

Decorative Lamp Post - CO50 / Base D25M

- Tapered, octagon composite pole shaft
- Direct embedded and anchor base models
- XTREME® elastomeric urethane base cover

Ordering Information:

Sample Catalog Number Logic

	B	C	D	E	F
CO50-D25M	22	DE	DGR	40	
CO50-D25M	22	AB	BLK	30	RC
Pole and Base Design	Above Grade Height	Installation Method	Color	Tenon O.D.	Options

B Above Grade Height

Cat No.	Description
6	6 feet /1.8 M
7	7 feet /2.1 M
8	8 feet /2.4 M
9	9 feet /2.7 M
10	10 feet /3.0 M
11	11 feet /3.4 M
12	12 feet /3.7 M
13	13 feet /4.0 M
14	14 feet /4.3 M
15	15 feet /4.6 M
16	16 feet /4.9 M
17	17 feet /5.2 M
18	18 feet /3.7 M
19	19 feet /5.8 M
20	20 feet /6.1 M
21	21 feet /6.4 M
22	22 feet /6.7 M

C Installation Method

Cat No.	Description
DE	Direct Embedded
AB	Anchor Base

D Color

Cat No.	Description
BLK	Black
DBZ	Dark Bronze
DGR	Dark Green
SLV	Silver
WHT	White
GRY	Grey
CC	Custom Color - Please provide a min. 3" x 3" color chip.
RAL	Please provide a four digit RAL color number.


E Tenon O.D. (Outside Diameter)

Cat No.	Description
30	3" (76 mm) O.D.
40	4" (102 mm) O.D.
99	Custom Tenon O.D.

F Options

Cat No.	Description
RC	Receptacle housing and a NEC-approved cover with 15A GFCI receptacle. Standard location is 12"/305 mm below the top of the pole.

- Other accessories are shown on the Accessories specification sheet.

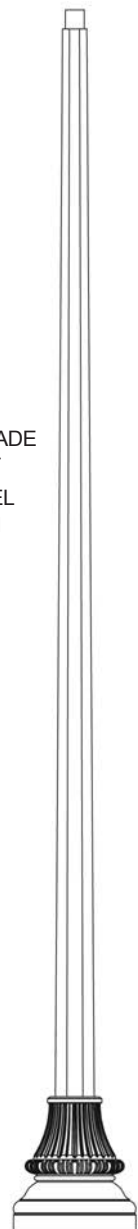


ABOVE GRADE
HEIGHT
20' MODEL
SHOWN

HEIGHT: 22"/559 mm

BASE DIAMETER: 20"/510 mm

CO50-D25M Tapered, octagon composite pole shaft

Direct Embedded - DE

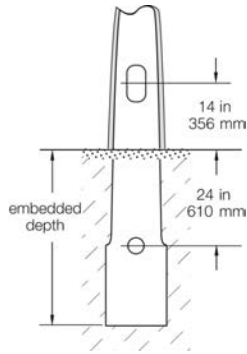

Shaft Length	Embedded Depth
6 to 13 ft	3 ft / .91 M
14 to 24 ft	4 ft / 1.2 M

* Embedded depths may vary per local codes, site soil conditions, drainage and very high wind conditions.

Specifications

POLE SHAFT

The CO50 pole shaft shall be octagon tapered, smooth with a .18"/4.6 mm per foot taper. The hand hole shall be 2.5"/64 mm x 5"/127 mm with a cover. The shaft shall be constructed of fiberglass combined with a thermosetting resin using an advanced centrifugal cast process. The hand hole area and hardware attachment areas shall be reinforced.

The butt end of the embedded-type post shall be octagon to increase the resistance to rotation. The post shall be non-conductive and chemically inert.

PERFORMANCE CRITERIA

The post shall be designed with a minimum safety factory of 1.5:1 and have no more than a 15% deflection at full wind loading. The post shall deflect no more than 2.5% of the above grade length with 100 lbs of lateral top load (stiffness). Poles shall be tested and rated per ANSI C136.20-2012.

DIRECT EMBEDDED INSTALLATION

Direct embedded poles shall have two 2.5 inch (64 mm) diameter holes at 180 degrees for conduit entrance 24 inches (610 mm) below finished grade. Embedded depths may vary per local codes, site soil conditions, drainage and very high wind conditions.

ANCHOR BASE

Anchor bases shall be constructed of hot dipped galvanized steel. The base shall be factory bonded to the post. The anchor base shall have four holes at ninety degrees, accommodating a bolt circle as indicated by the chart.

POST TOP

A painted aluminum or galvanized steel tenon shall be factory bonded to the pole for mounting a post-top luminaire or arm.


FINISH

The surface of the pole shall be uniform and consistent for the entire length of the post. A UV-resistant catalyzed urethane coating shall be extremely durable and retains its gloss after a 5000 hour exposure test per ASTM G154, with no dulling or chalking of the surface.

ORNAMENTAL BASE COVER

The ornamental decorative base cover shall be one or two piece and constructed of a proprietary elastomeric urethane and finished to match the post. The base shall be corrosion free and extremely resistant to impact and chipping.

Anchor Base Installation - AB

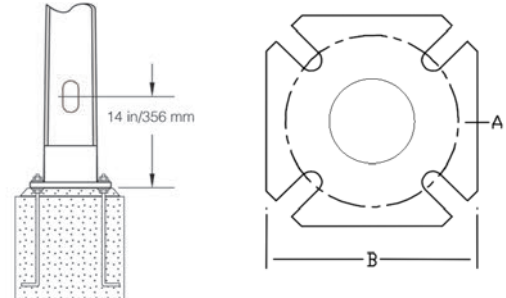

Shaft Length	Bolt Circle (A)	Base Plate Size (B)	Anchor Bolts
6' - 21' (1.8 M to 6.4 M)	9" - 11" (229 mm - 279 mm)	10" (254 mm)	3/4" x 30"
22' (6.7 M)	12" (305 mm)	11.5" (292 mm)	1" x 30"

Wind Loading Data

Cat No.	Description	WT	WIND SPEED (MPH) WITH 3 SECOND GUST FACTOR						
			90	100	110	120	130	140	150
6	6 feet/1.8 M	31	40.1	32.1	26.2	21.8	18.3	15.6	13.4
7	7 feet/2.1 M	37	35.9	28.8	23.4	19.4	16.3	13.9	11.9
8	8 feet/2.4 M	42	33.4	26.7	21.7	18.0	15.1	12.8	11.0
9	9 feet/2.7 M	48	31.7	25.2	20.5	16.9	14.2	12.1	10.4
10	10 feet/3.0 M	54	29.6	23.5	19.0	15.7	13.2	11.2	9.6
11	11 feet/3.4 M	59	28.6	22.7	18.3	15.1	12.7	10.7	9.2
12	12 feet/3.7 M	65	27.5	21.8	17.5	14.4	12.1	10.2	8.7
13	13 feet/4.0 M	70	26.3	20.7	16.6	13.6	11.4	9.6	8.2
14	14 feet/4.3 M	76	24.1	18.9	15.1	12.3	10.3	8.7	7.4
15	15 feet/4.6 M	81	24.0	18.8	14.9	12.2	10.1	8.6	7.3
16	16 feet/4.9 M	87	23.0	17.9	14.2	11.5	9.6	8.1	6.8
17	17 feet/5.2 M	93	21.9	17.0	13.4	10.8	9.0	7.5	6.4
18	18 feet/5.5 M	98	20.8	16.0	12.5	10.1	8.3	7.0	5.9
19	19 feet/5.8 M	104	19.6	15.1	11.7	9.3	7.7	6.4	5.4
20	20 feet/6.1 M	109	18.5	14.1	10.8	8.6	7.0	5.8	4.9
21	21 feet/6.4 M	115	17.3	13.0	9.9	7.8	6.4	5.2	4.4
22	22 feet/6.7 M	126	15.0	11.1	8.2	6.4	5.2	4.2	3.4

Wind speed values are for a 3 second gust per ASCE. Calculated per ANSI C136.20-2012. Assumes load 12 inches above the pole top. Safety factor = 1.5:1. Maximum weight for tenon mount is 100 lbs. Contact factory for AASHTO or specific local codes.