

ELEVATION VIEW


SECTION A-A

RECOMMENDED STANCHION SPACING		
STANDARD	LOADING	MAX CRS
AS/NZS 1657	0.35 kN/m	1.8 m*
AS/NZS 1170 (C3)	0.75 kN/m	1.5 m

*LONGER STANCHION SPACING MAY BE POSSIBLE THROUGH CONSULTATION WITH THE WEBFORGE LOCKER TECHNICAL TEAM; CONDITIONS APPLY


NOTES:

- CUSTOMER TO NOMINATE STANCHION TYPE (IN GROUND, PLATFORM OR SIDE).
- PROTECTION TREATMENT AND PAINT SYSTEMS TO BE IN ACCORDANCE WITH CLIENT REQUIREMENTS.
- ALL POSTS TO BE 40NB (48.3 OD, 3.2 THICK) STEEL PIPE.
- SLIP JOINTS CAN BE REQUESTED BY CLIENT IF HOT WORKS ARE NOT PERMITTED ON SITE.
- REFER "MWBR-EX-005" FOR WELDING DETAILS.
- BARRIER DESIGNED TO MEET NZBC-F4.
- COLD GALVANISING TREATMENT FOR IN-SITU WELDS, CUT ENDS OR OTHER BARE STEEL TO BE IN ACCORDANCE WITH AS/NZS 4680:2006 CLAUSE 8 REPAIR PROCEDURE.
- PEDESTRIAN BARRIERS ARE NOT INTENDED TO BE USED IN SITUATIONS WHERE MOTOR VEHICLES REQUIRE RESTRAINT.

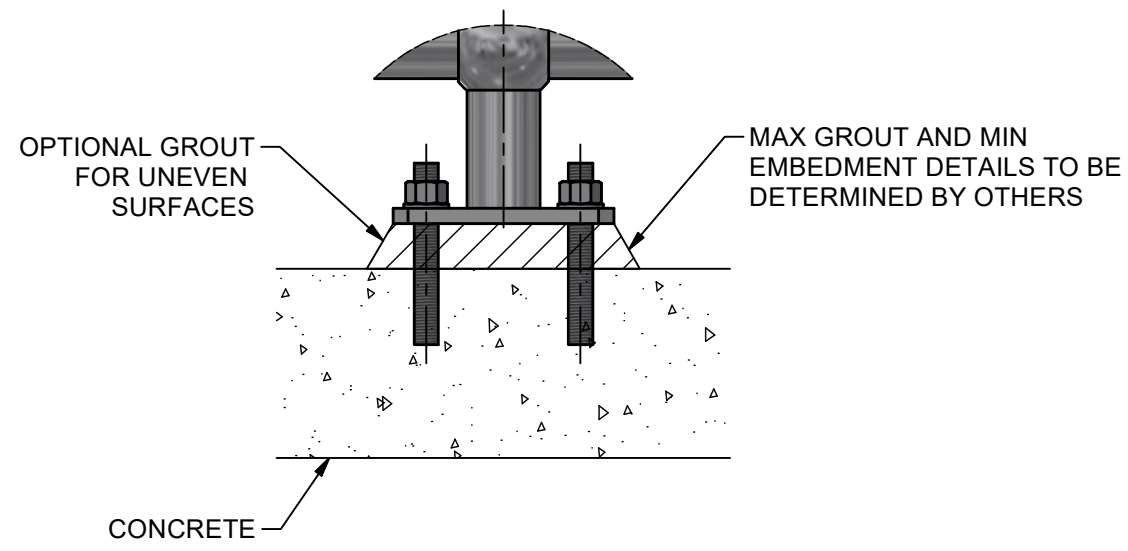

DETAIL 1

FOOTING DETAIL FOR CONCRETE MOUNTING

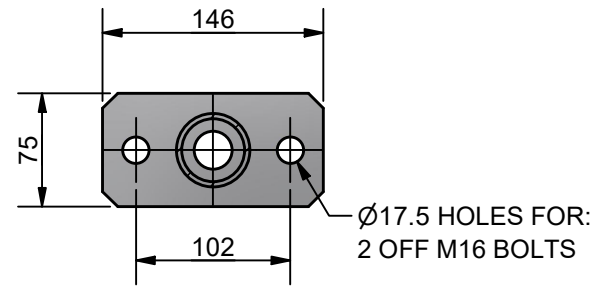

SECTION B-B

TYPICAL BASE PLATE DETAIL FOR PLATFORM AND SIDE STANCHIONS

1	NOTES REVISED	25/09/25	AJM
0	ISSUED FOR PUBLICATION	17/03/25	AJM
REV	DESCRIPTION	DATE	DRAWN

<p>PROJECTION DO NOT SCALE</p>	DRAWN	AJM	CLIENT WEBFORGE LOCKER PRODUCT MONOWILLS BALUSTRADE - 1100 - FULL BARRIER ASSEMBLY
	DRAWN DATE	17/03/25	
	APPROVED	MT	
	APPROVED DATE	17/03/25	
ALL DIMENSIONS IN mm U.N.O.		<p>A valmont COMPANY</p>	
DRAWING NUMBER		SHEET	REV
MWBA-EX-002		1 OF 1	1

DRAWING DISCLAIMER:
WEBFORGE PROVIDES THE INFORMATION CONTAINED IN THIS DRAWING AS A GUIDE FOR YOUR INFORMATION ONLY. WEBFORGE HAS TAKEN REASONABLE CARE TO ENSURE THE ACCURACY OF THE INFORMATION AT THE TIME OF PRODUCTION. WEBFORGE EXPRESSLY DISCLAIMS ALL LIABILITY WHATSOEVER FOR (INCLUDING ANY DIRECT OR INDIRECT LOSS OR DAMAGE, COSTS OR EXPENSES HOWSOEVER INCURRED BY ANY PERSON) RELIANCE ON THE WHOLE OR ANY PART OF THE INFORMATION CONTAINED IN OR OMITTED FROM THIS DRAWING. WEBFORGE RESERVES THE RIGHT TO MAKE TECHNICAL CHANGES WITHOUT NOTICE.