

Genus Noisewall

Acoustic Protection

NEW PRODUCT



TESTED, CERTIFIED AND PROVEN PERFORMANCE

The Genus Noisewall™ is a patented high performance acoustic protection for road, rail, and urban environments.

The Genus Noisewall acts as a resonant absorber as well as a reflective barrier.

Constructed using the latest in advanced polymers and engineered to maximise acoustic performance, the Genus Noisewall also features high impact resistance.

It's resistant to growing lichen or moss, and combined with an easy to clean and graffiti resistant surface makes it ideal for maintaining it's appearance over time.

The intelligent panel manufacture feautres a one-piece moulding meaning no assembly is required and can be rapidly installed. The durable, highly UV stable polymer is adapatable to having custom panel face designs and colours made to suit the situation.

The Genus Noisewall is not only functional but can also be architecturally and aesthetically designed to suit it's installed evironment.



Features & Benefits

- Ease and speed of installation
- No fixings required to attach to columns
- Double tongue and groove to minimise noise transmission through horizontal joints
- Built-in acoustic seal around posts
- Light weight only 50kg per 4m panel
- Optional stiffening steel bar simply dropped between panels to increase wind loading
- Architecturally and aesthetically adapatble

www.ingalcivil.com.au

Ingal Civil Products Ref: JA0517

- Sydney (02) 9827 3333
- Melbourne (03) 9358 4100 Adelaide (08) 8169 2300
- Perth (08) 9452 9111
- Wagga 0427 779 588
- Brisbane (07) 3489 9125
- Newcastle 0400 235 883
- sales@ingalcivil.com.au



Genus Noisewall


Acoustic Protection


NEW PRODUCT

The Genus Noisewall™ Advantage

- Performance Tested and proven
- Certification To international standards
- Manufacturing To quality assured ISO 9001

- Installation Speed and simplicity
- Environment Sympathetic and 100% recyclable
- Price Initial outlay and cost of life

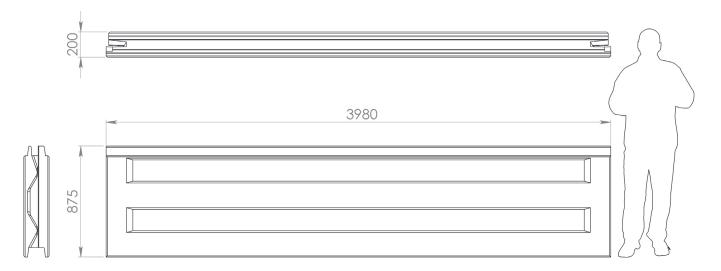



The Genus Noisewall™ is manufactured by �Ge∩US

SPECIFICATIONS

Panel Length	3980mm
Effective Panel Height	800mm
Capping Height	200mm
Custom Colours	Yes
Panel Material	Stabilised UV
Stiffening Bars	Galvanised Steel
Weight (per panel)	50kg

- - Sydney (02) 9827 3333
- Brisbane (07) 3489 9125
- Melbourne (03) 9358 4100 Adelaide (08) 8169 2300
- Perth (08) 9452 9111
- Newcastle 0400 235 883
- Wagga 0427 779 588
- sales@ingalcivil.com.au