

Profile | Titan 120 or R12749

Material Finish Open Area* **Stock Status** Max. Width Max. Length Weight* Thickness 0.125"

Aluminum Anodized, Powder Coated 49% Stock / Custom Made 60" 16' 4" 0.8397 lb/ft²



* Typical Architectural Facade Installation

Applications:

Decorative Panels, Cladding, Facades, Ceiling Tiles


Attachment Methods:

Screw Fastened or Tensile Cable

Extras Notes:

Folding of sides recommended for rigidity and to maintain flatness. Other materials and thickness can be manufactured upon request.

* OA and Weight calculations are based on 0.12 (3.0mm) aluminum.

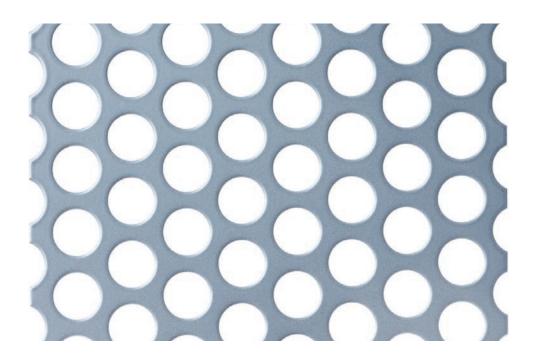

Contact your local Sales Representative today at: 941.402.3554 • facades@valmont.com

Copyright © 2019 Valmont® Industries, Inc. All rights reserved. Valmont® Structures has a policy of continuous product improvement and development. As a result, certain changes in standard equipment, options, price, etc., may have occurred after the publication of this document. Some drawings and specifications may not be identical to current production. Valmont Structures reserves the right to change product design and specifications at any time without incurring obligations. SPC7905 09/19