





Cross Section



Dart Square - 2T  
(Standard)



Finish Options



## KOLI

### *Square Tapered Decorative Wooden Pole*

**Pole Shaft** – Wood shafts are manufactured from glued-laminated timber. The raw materials used are harvested from sustainability managed, PEFC certified forests in Finland. Wood shaft combined with a steel base section.

**Handhole** – All pole assemblies are provided with a 15.75" x 3.35" (19.69" x 3.94" for Koli 10 pole) rectangular handhole located 19.69" from the base plate.

**Base Cover** – A two-piece square Dart (2T) spun aluminum cover is provided with each pole assembly.


**Anchor Bolts** – Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" bend on one end and are galvanized a minimum of 12" on the threaded end.

**Finish** – Wood pole section is finished with a water-based stain consisting of four protective coats. Multiple color stain options available (see below). The galvanized steel pole section, comes with a polyester silver grey powder applied coating finish in accordance with the Valmont® Structures specifications.

## KOLI Square Tapered Decorative Wooden Pole

### Anchorage Data

KOLI	Base Plate		Anchor Bolts (IN)		
	Bolt Circle	Width	Dia x Length x Hook	Projection	+/-
4	11.13"	10.63	.75 x 17.00 x 3.00	3.75	0.5
5	11.13"	10.63	.75 x 17.00 x 3.00	3.75	0.5
6	11.13"	10.63	.75 x 17.00 x 3.00	3.75	0.5
7	11.50"	12.0	1.00 x 36.00 x 4.00	4.13	0.25
8	11.50"	12.0	1.00 x 36.00 x 4.00	4.13	0.25
10	11.50"	12.0	1.00 x 36.00 x 4.00	4.13	0.25

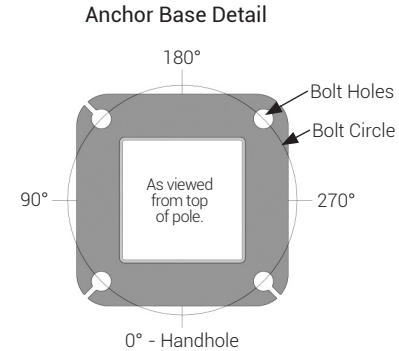

### Designation, Load and Dimensional Data

KOLI	Pole Dimensions					Design Information					
	Height (ft)	Top ø	Base ø	Steel Section Height	Internal Pole Dimensions	90		100		110	
						Max EPA	Max Weight	Max EPA	Max Weight	Max EPA	Max Weight
4	13.12	3.94	5.51	51.18	w3.15*d4.13	18.8	470	14.2	355	10.8	270
5	16.40	3.94	5.51	51.18	w3.15*d4.13	13	325	9.4	235	6.6	165
6	19.69	3.94	5.51	51.18	w3.15*d4.13	8.4	210	5.4	135	3.2	80
7	22.97	4.72	6.30	55.12	w3.15*d4.92	9.6	240	5.8	145	3	75
8	26.25	4.72	7.09	55.12	w3.15*d5.71	5.8	145	2.6	65	N/A	N/A
10	32.81	4.72	7.87	62.99	w3.74*d6.50	3.6	90	N/A	N/A	N/A	N/A

1. EPA values are calculated using fastest mile winds. EPA represents the Effective Projected Area of each luminaire. Designs are limited to top mount or side-mount luminaires. Variations from sizes above are available upon inquiry at the factory. Satisfactory performance of poles is dependent upon the pole being properly attached to a supporting foundation of adequate design. Structure weight is a nominal value which includes the pole shaft and base plate. \* Shafts may be a two piece assembly.

Wind loading is based on AASHTO LTS-6 (2013) design.

Job Name:	_____
Job Location - City:	_____ State: _____
Quote:	_____
Client Name:	_____
Created By:	_____ Date: _____
Customer Approval:	_____ Date: _____

