


# Kinderlou Style, 17" x 17"




- Fiberglass reinforced composite, virtually maintenance free
- One-piece construction, non-conductive
- Superior wind, loading, and environmental tolerance
- Anchor Base or Direct Burial mounting
- Smooth or fluted tapered shafts
- Standard or architectural colors available, or any color can be matched
- Gloss or semi-gloss finishes standard; aggregate and custom finishes available
- Mounting heights of 9.5 to 14 feet
- Standard 3" x 3" dia. aluminum tenon for luminaire mounting (2 3/8" also available)



Luminaires, arms and attachments sold separately.

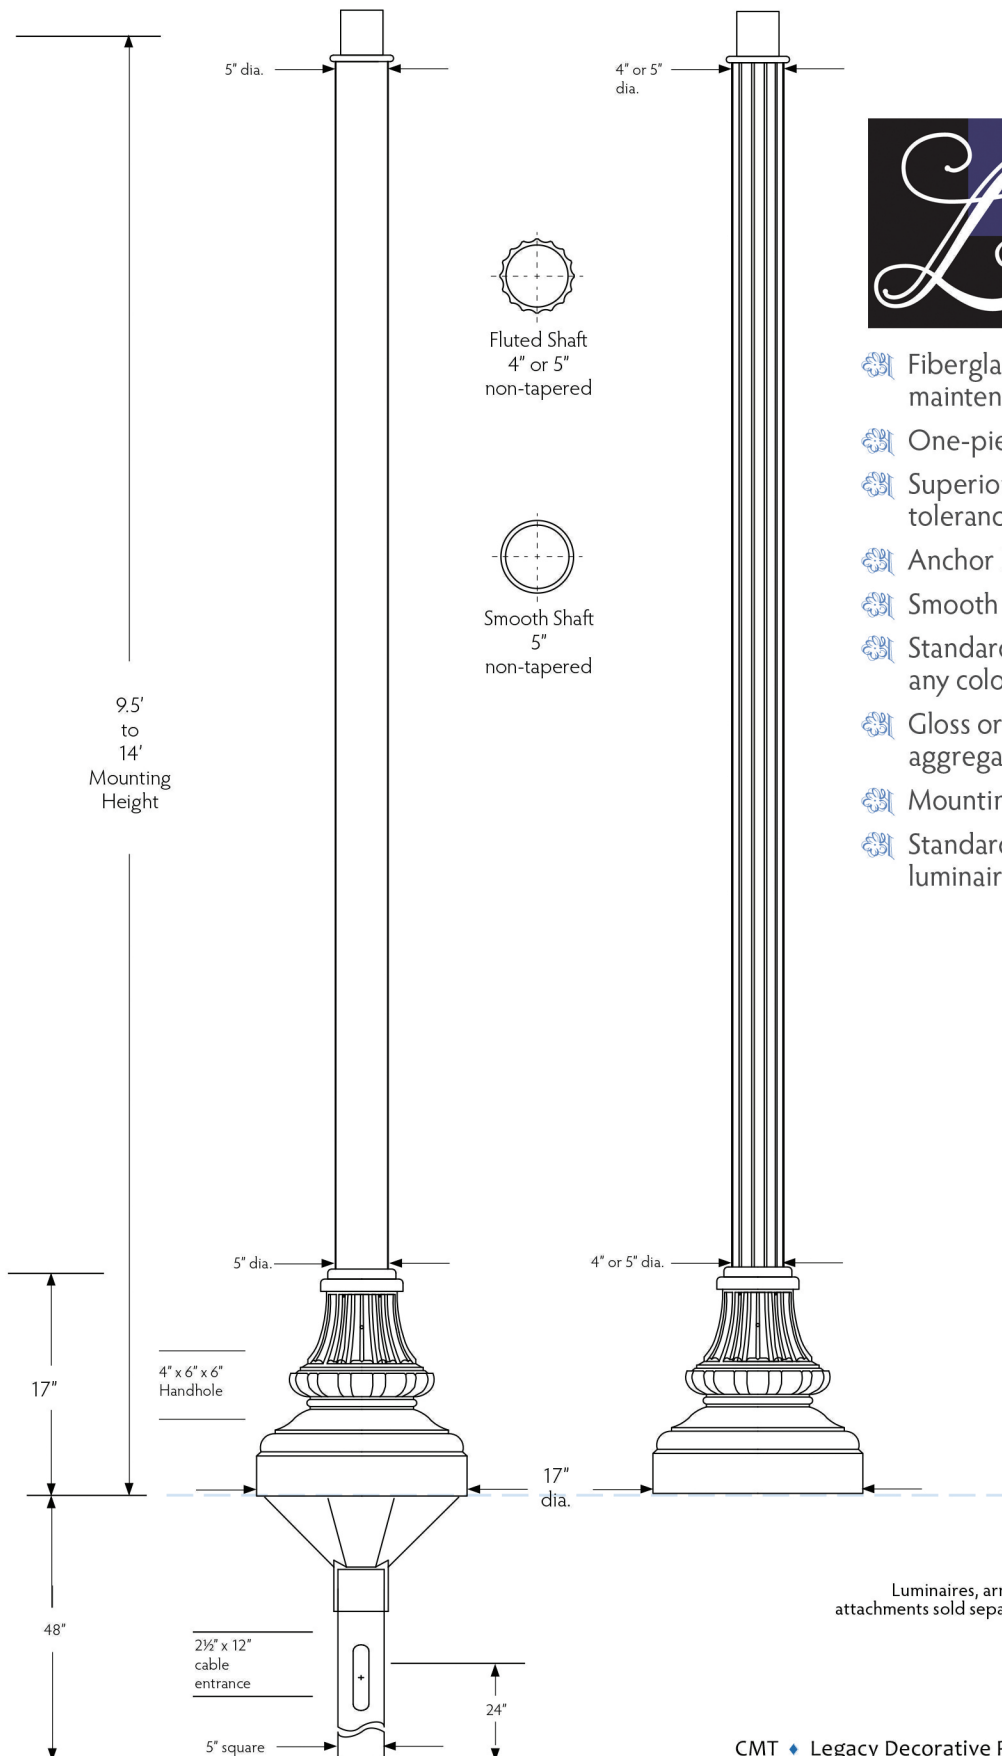

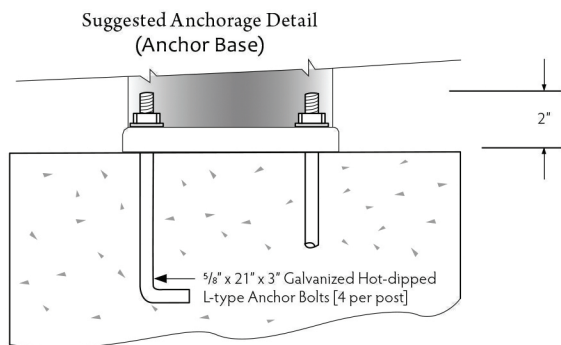


## OPTIONS

Weatherproof **receptacle** mounted 12" from top of pole, 90° clockwise from handhole: add **"GFI"** to the catalog number.

Banner **arms**, flag **brackets**, **luminaires**, and other **attachments** are available. Contact plant.

### Kinderlou Anchor Bolt Pattern Detail

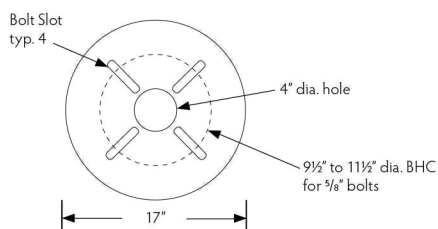

## How to Order

Series: L=Legacy

	<b>Installation</b> A=Anchor Base B=Direct Burial	<b>Finish</b> S=Smooth T=Textured E=Exposed Aggregate	<b>Tenon</b> T238=2⅜" T300=3"								
<b>L</b>	<b>K</b>	<b>B</b>	<b>12</b>	<b>-</b>	<b>S</b>	<b>-</b>	<b>3</b>	<b>-</b>	<b>T300</b>	<b>-</b>	<b>FS4</b>
<b>Style Name</b> K=Kinderlou		<b>Mounting Height (ft.)</b> 9.5 to 14'		<b>Color</b> 2=Dk Bronze 3=Black 6=Green 0=Specify (supply color chip with order)				<b>Shaft</b> FS5=5" Straight Fluted SS5=5" Straight Smooth FS4=4" Straight Fluted			

## How to Specify

**Description:** The pole shaft and base (and mounting flange) shall all be molded of non-corroding fiberglass reinforced composite, pigmented throughout, and finished in the same color as specified. The 4" (5") diameter, (fluted) shafts shall be non-tapered and formed with 12 flutes separated by semi-flat ribs. The 5" diameter (smooth) shafts shall be centrifugal cast with a smooth, non-tapered surface. The base shall be shaped similar to CMT Kinderlou style **LKA** (anchor base) / **LKB** (direct burial).

**Dimensions:** The pole shall be 9.5 to 14 feet mounting height (custom heights available) with a 17-inch diameter base. A 3" diameter by 3" high aluminum tenon shall be provided for luminaire mounting. (Direct Burial) The direct burial foundation shall be 48" overall length and provided with a 2.5" x 12" conductor entrance centered 24" from the bottom of the direct burial base. (Anchor Base) The external mounting flange shall accommodate 4 anchor bolts 5/8" x 21" x 3" in a 9.5" to 11.5" bolt circle.

**Construction:** The (smooth) shaft shall be round with a uniform taper. The (fluted) shaft shall be uniformly tapered. A handhole with a weather resistant cover shall be provided in the base for wiring access and (if anchor base) anchorage. The trapezoidal opening shall be no smaller than 4" by 6" by 6" high. The cover shall be made of fiberglass reinforced composite and shall bear the manufacturer's name. The cover shall be attached with a stainless steel flat countersunk hex socket head screw. A threaded insert and support bracket shall be incorporated in the pole base.

The (anchor base) mounting flange shall be molded in one piece of fiberglass reinforced composite with a minimum thickness of 1" and shall be permanently bonded flush to the bottom of the base. Each pole shall be finished with a weather resistant polyurethane having a minimum dry film thickness of 1.5 mils.

## EPA and Wind Rating

CMT Kinderlou style poles are engineered to withstand at least 100 mph wind forces, with luminaires up to 6.2 EPA (sq. ft.) weighing up to 150 pounds. Many other loading options are available. For other loading requirements, contact the plant.



145 Wood Street, Estill, SC 29918  
803-625-3131 • 800-416-4276 • Fax: 803-625-4722  
[www.cmt-poles.com](http://www.cmt-poles.com)

All dimensions and specifications nominal, and subject to change without notice or obligation. Please contact plant before site preparation begins.