


Job Name: _____	Client Name: _____
Job Location - City: _____ State: _____	Created By: _____ Date: _____
Product: _____ Quote: _____	Customer Approval: _____ Date: _____

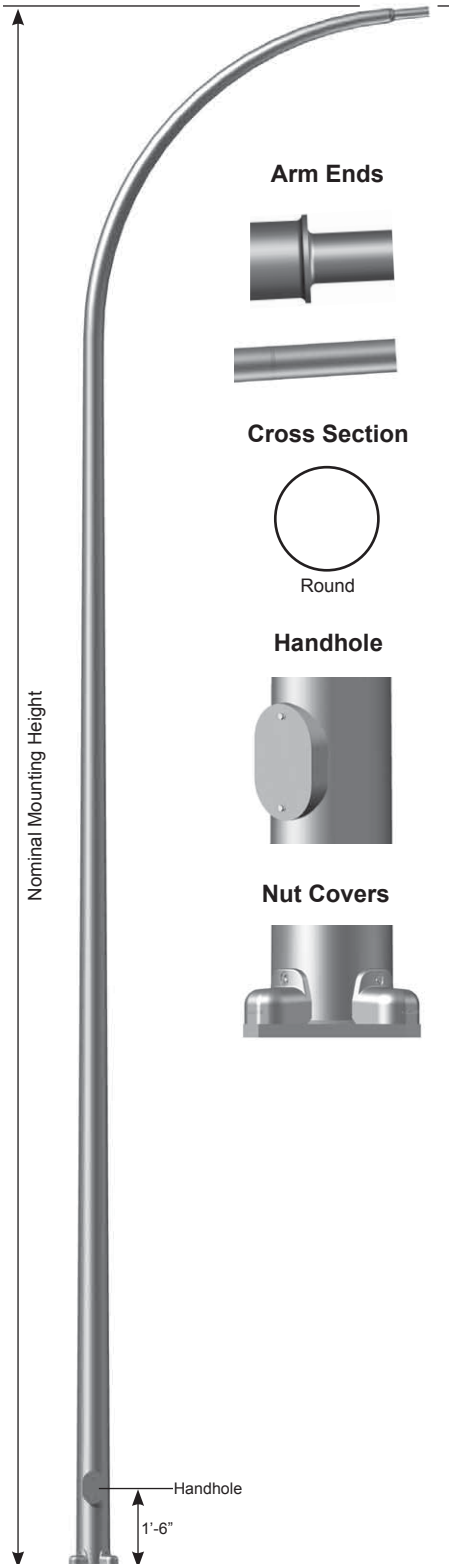

## SPECIFICATIONS

**Pole** - The pole shaft conforms to ASTM A595 Grade A with a constant linear taper of 0.14 in/ft.

**Davit Arm** - Davit arm shaft conforms to ASTM A595 Grade A with a constant linear taper of 0.14 in/ft. A single davit arm is either an integral part of the pole shaft or a separate section which slipfits the pole shaft. Double davit arms are a separate section which slipfits the pole shaft. Double luminaire arms can only be oriented 180° apart.

**Handhole** - A covered handhole and grounding provision with hardware is provided.

**Nut Covers** - Anchor bolt nut covers with hardware are provided.

**Full Base Cover** - Optional two-piece full base cover is fabricated from ABS plastic. Valmont reserves the right to provide an optional two-piece steel full base cover on some applications depending upon the finish requirement and/or pole base diameter.

**Anchor Base** - The anchor base (base plate) conforms to ASTM A36.


**Anchor Bolts** - Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" bend on one end and are galvanized a minimum of 12" on the threaded end.

**Hardware** - All structural fasteners are galvanized high strength carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

**Finish** - Standard finishes are galvanized, prime painted or any of Valmont's V-PRO™ Protection Systems. Additional finish options available upon request.

**Design Criteria** - Please reference Design Criteria Specification for appropriate design conditions.

## ARM DATA




ROUND TAPERED STEEL  
Smooth  
DS90

Job Name: _____	Client Name: _____
Job Location - City: _____ State: _____	Created By: _____ Date: _____
Product: _____ Quote: _____	Customer Approval: _____ Date: _____

ANCHORAGE DATA

POLE BASE OD (IN)	BASE PLATE				ANCHOR BOLTS		
	BOLT CIRCLE						
	DIA (IN)	± (IN)	SQUARE (IN)	THK (IN)	DIA x LENGTH x HOOK (IN)	PROJECTION (IN)	± (IN)
6.43	9.50	0.50	10.50	0.875	1.00 x 36.00 x 4.00	4.13	0.25
7.13	10.00	0.50	10.88	0.875	1.00 x 36.00 x 4.00	4.13	0.25
7.50	10.50	0.50	11.25	0.875	1.00 x 36.00 x 4.00	4.13	0.25
7.82	11.00	0.50	11.50	0.875	1.00 x 36.00 x 4.00	4.13	0.25
8.00	11.00	0.50	11.50	0.875	1.00 x 36.00 x 4.00	4.13	0.25
9.00	12.50	0.50	12.38	1.000	1.00 x 36.00 x 4.00	4.25	0.25
9.50	13.00	0.50	13.00	1.000	1.00 x 36.00 x 4.00	4.25	0.25

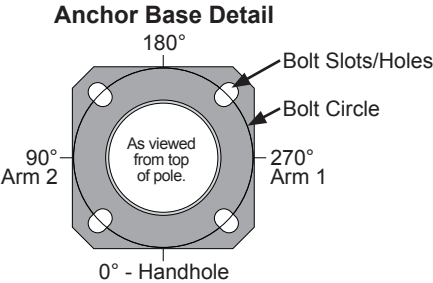

LOAD AND DIMENSIONAL DATA

DESIGN INFORMATION					POLE DIMENSIONS				MODEL NUMBER
NOMINAL MOUNTING HEIGHT	QUANTITY OF ARMS	ARM LENGTH (FT)	100 MPH w/1.3 GUST		BASE OD (IN)	TOP OD (IN)	WALL THK (GA)	STRUCTURE WEIGHT <sup>2</sup> (LBS)	
			MAX LUMINAIRE EPA <sup>1</sup> (SQ.FT)	MAX LUMINAIRE WEIGHT <sup>1</sup> (LBS)					
25'-0"	Single	6'-11"	2.0	75	6.43	2.40	11	195	R643A28T
	Double	6'-11"	2.0	75	7.50	3.80	11	320	R750A286
30'-0"	Single	6'-11"	2.0	75	7.13	2.40	11	235	R713A33T
	Double	6'-11"	2.0	75	8.00	3.60	11	370	R800A336
35'-0"	Single	6'-11"	2.0	75	7.82	2.40	11	290	R782A389
	Double	6'-11"	2.0	75	9.00	3.90	11	450	R900A386
40'-0"	Single	6'-11"	2.0	75	9.50	3.40	11	410	R950A436
	Double	6'-11"	2.0	75	9.50	3.40	11	495	R950A436

1. EPA represents the Effective Projected Area of each luminaire. Designs are limited to one luminaire per arm. Variations from sizes above are available upon inquiry at the factory. Satisfactory performance of poles is dependent upon the pole being properly attached to a supporting foundation of adequate design.
2. Structure Weight is a nominal value which includes the pole shaft, base plate and luminaire arm(s) only.

PRODUCT ORDERING CODES

DESIGN SERIES	MODEL NUMBER	FIXTURE MOUNTING	FINISH	COLOR	V-PRO™ PROTECTION SYSTEM	OPTIONS
DS90	R643A28T R750A286 R713A33T R800A336 R782A389 R900A386 R950A436	6S = 6' Single 6D = 6' Double	GV = Galvanize PP = Prime Paint FP = Finish Paint GF = Galvanized + Finish Paint	-- = Galvanize -- = Prime Paint WH = White ST = Sandstone BK = Black SM = Silver Metallic SL = Silver LG = Light Gray SG = Slate Gray DT = Dark Tan MB = Medium Bronze CB = Bronze DB = Dark Bronze BN = Brown HG = Hunter Green DG = Dark Green RD = Red SC = Special Color (Contact Factory)	-- = Galvanize -- = Prime Paint V1 = V-PRO 1 Basic 1 Coat Powder. V2 = V-PRO 2 2 Coat Powder or Liquid. Includes epoxy primer & top coat. V3 = V-PRO 3 2 Coat Powder or Liquid. Includes zinc primer & top coat. V4 = V-PRO 4 2 Coat Powder or Liquid. Includes zinc primer & premium top coat.	See Accessories at valmontstructures.com (Please Specify)